

# Din Rail Meter

## LHE34D

### Product Introduction

LHE34D is three phase multi-function direct connect rail-mounted meter. LHE34D intended to measure grid parameters, e.g. active energy, reactive energy, voltage, current, power, power factor and frequency. The RS485 interface provides power monitoring data for inverters and other devices to realize fast response control. Standard DIN rail installation, with small size, easy to install..

Widely used in distributed photovoltaic, energy storage power station and other new energy field power data monitoring.



### Product Highlights

#### ◆ Safe Operation

RS485 is physically isolated from the high voltage terminals

#### ◆ Fast Instantaneous Refresh

Support voltage, current, active power, reactive power, power factor and other instantaneous response of 100ms

#### ◆ Communication Function

Supports RS485 communication port, supporting up to 115200 baud rate

#### ◆ Module Expansion Interface

Supports 12V 2.5W power supply, which can be used to expand wireless communication modules such as Bluetooth and WiFi to realize wireless communication with inverter devices

### Main Functionalities

#### ◆ Measurement

- Total import & export energy kWh
- Total import & export energy kvarh (optional)

#### ◆ Instantaneous Values

- Voltage
- Current
- Frequency
- Power factor (total and each phase)
- Power (active and reactive total and each phase)

#### ◆ Interface

- 1 Power Supply Output: 12V, 2.5W
- 1 RS485 Port, Protocol: Modbus-RTU

#### ◆ LCD


Backlight (optional)



## Specifications

	Parameters
Connection	Three-phase Four-wire (3P4W); Three-phase Three-wire (3P3W)
Voltage	Nominal Voltage: 3x120/210V, 3x230/400V, 3x240/415V Operating Voltage Range: 70%Un~130%Un
Current	3*5 (80)A
Accuracy	Active energy: Class 1, Reactive energy: Class 2
Frequency	50Hz/60Hz
Temperature	Operation range:-25 C ~+55 C Limit range for storage and transport:-40 C ~+85 C
Humidity	Up to 95% non-condensing
Power Consumption in Voltage Circuit	≤2W,10VA
Power Consumption in Current Circuit	≤1VA
Communication Port	RS485 communication port, Modbus-RTU Protocol Baud rate:1200、2400、4800、9600、19200、38400 (configurable)
Dimension (HxWxD)	101mmx72mmx67mm
Certification	CE, MID, RoHS

## Dimensions & Connection Diagram

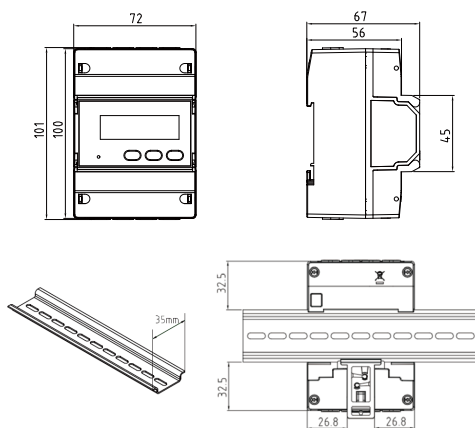

### Connection Diagram

